




### Unmatched PORTABILITY & SIMPLICITY

for a Wide Variety of Access Needs:

Quickly Assembled . No-Tools Mast Connection System . Ultra Lightweight



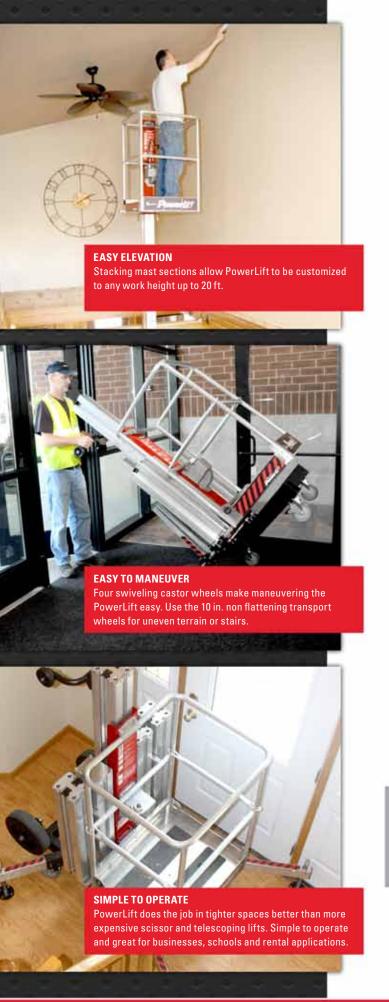



Finally, there is a practical lift for tight spaces in industrial buildings, offices and even residential.

### **SAFETY**

- · Complies with safety standards
- Fully enclosed personnel basket
- · Safety harness anchor point
- Emergency lowering system

### **ULTRA LIGHTWEIGHT**

- One-person operation
- Easy on finished floors
- · Can go anywhere, even up stairways
- · Use outdoors and on turf


### **PORTABILITY**

- 360° turning radius
- · Easily rolls across rough terrain
- Easily transports on the hitch of a vehicle
- · Fits through standard doors and closets

### **SIMPLICITY**

- · No electronics
- No hydraulics
- No sensors
- No batteries









### STOWABLE MAST SECTIONS

Mast extensions are conveniently stowed alongside the basket. Adding, removing and stowing mast sections takes only seconds.

### **DUAL ACCESS BASKET**

Dual Access basket allows entry and exit from two sides. The basket easily removes for transport and storage.

### **EXCLUSIVE TECHNOLOGY**

Reechcraft's exclusive PowerTrak™ technology includes a gearbox with internal clutch and cone brake for added safety.

# Nothing Else Stacks Up.



## ADD MAST SECTIONS TO "BUILD" POWERLIFT TO THE HEIGHT NEEDED FOR THE JOB.

Specially designed coupler system allows for quick and easy attachment of extensions. Lock levers prohibit the advancement of the basket unless they are securely locked in place.



#### **EASY-TO-ADJUST**

Easy-to-adjust outrigger pads fit in tight spaces. Ultra lightweight load is easy on floors and more useful in outdoor turf and terrain conditions.



### **EASY TO TRANSPORT**

12 in. flat free transport tires allow easy movement across uneven terrain, curbs and steps.



Four non-marking, locking castor wheels on the main carriage make maneuvering the PowerLift easy.









Description	M20	PL60
Conforming Standards	ANSI A92.3	ANSI A92.3
Power Source	AC or DC Drill	AC or DC Drill
Rated Horizontal Force	52.5 lbs (234 N)	52.5 lbs (234 N)
Machine Weight	278 lbs (126 kg)	310 lbs (141 kg)
Swivel/Lockable Caster Diameter	5 in. (127 mm)	127 mm
Platform Size (L x W)	26 in. x 30 in. (660 mm x 762 mm)	26 in. x 30 in. (660 mm x 762 mm)
Mast Section Weight	20.7 lbs (9.4 kg)	28.5 lbs (12.9 kg)
Rear Outrigger Weight	7.8 lbs (3.6 kg)	9.3 lbs (4.2 kg)
Front Outrigger Weight	10.3 lbs (4.7 kg)	10.6 lbs (4.8 kg)
Flat Free Transport Wheels	12 in. x 3.5 in. (205 mm x 89 mm)	12 in. x 3.5 in. (305 mm x 89 mm)
Drive	Worm Drive with Integrated Drive Gear & Brake	Worm Drive with Integrated Drive Gear & Brake
Stowed Length	53 in. (1346 mm)	53.4 in. (1356 mm)
Stowed Width	30 in. (762 mm)	30 in. (762 mm)
Stowed Height	69 in. (1741 mm)	69 in. (1741 mm)
Minimum Platform Height	12.9 in. (329 mm)	12.9 in. (329 mm)
Outrigger Footprint Width	52.1 in. (1324 mm)	67.1 in. (1705 mm)
Outrigger Footprint Length	58.9 in. (1496 mm)	64.4 in. (1635 mm)
Distance from Wall Side	11 in. (281 mm)	18.5 in. (471 mm)
Distance from Wall Front	12.3 in. (314 mm)	10.3 in. (261 mm)
Erected Mast Height	16.3 ft (5.0 m)	21.7 ft (6.60 m)
Maximum Platform Height	14.3 ft (4.34 m)	19.5 ft (5.94 m)
Maximum Working Height*	20.3 ft (6.19 m)	25.5 ft (7.77 m)

<sup>\*</sup>Maximum Platform Height plus 2 m.

### **ADDITIONAL ACCESSORIES**





### **HITCH HAULER**

- Eliminate the need for a trailer
- Transport PowerLift by any vehicle with a 2in. receiver hitch
- Load or unload PowerLift in under 15 seconds
- Keep utilization of pickup box or cargo area

### **OPTIONAL NARROW PLATFORM**

20 in. wide by 26 in. long by 42 in. tall and designed to fit T-bar ceiling and tight space applications. No tools installation - great rental option.



