


# Put OMG in your plans.

ADHESIVES | DRAINS | FASTENERS | PIPE SUPPORTS *and more!*

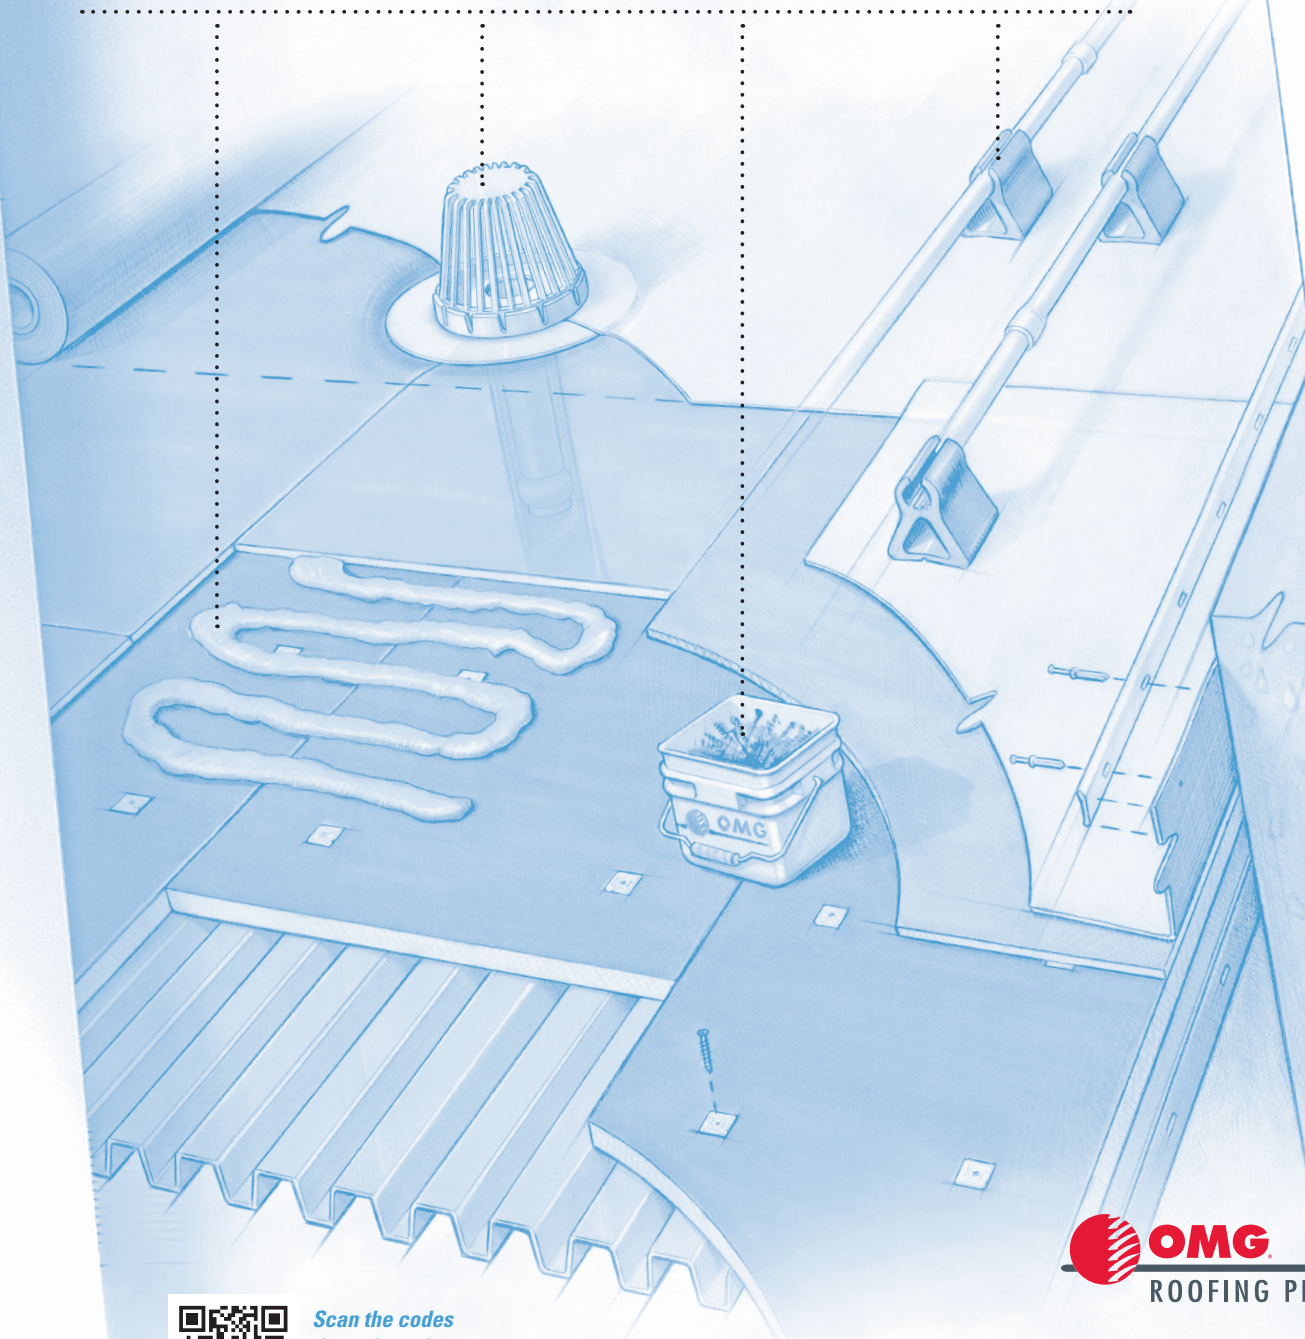

Scan the codes  
throughout the  
catalog to see  
videos online!

 **OMG**  
ROOFING PRODUCTS

Superior productivity.  
Superior performance.



# The OMG advantage

When it comes to supplying the low-slope roofing industry with products and services that improve productivity and enhance roof system performance, no one offers more than **OMG Roofing Products**.

OMG has the broadest product line in the industry: from the widest selection of specialty fasteners, to insulation adhesives, pipe supports, retrofit roof drains and productivity tools.

We help by having enough "feet on the street" to back every product we sell, and to be there when you need us to help find the best fastening solution for your project.

Because our field specialists are not independent representatives, there's no hidden agenda or other system to sell. Whether you need a pull-test, job start or extra training for your crew, OMG is there to help.

For the latest fastening solutions and productivity tools, contact your local OMG field specialist or visit [www.OMGRoofing.com](http://www.OMGRoofing.com).



Superior productivity.  
Superior performance.

Look for the Ergonomic Excellence  
symbol on many OMG products.



## drains & flashings

*Strong, durable OlyFlow® Drains –  
so easy to install,  
you won't need a subcontractor!*



*Hercules style retrodrains are available with  
PVC and TPO coated flange for direct membrane  
attachment.*

OMG offers the broadest line of insert drains in the industry, all designed to provide a secure, watertight connection to the existing plumbing drain leader. The **Hercules® Drain** is the industry's top selling insert drain! It has a one-piece spun aluminum body that features an extra-large flange for securing the roof cover as well as a depressed sump to enhance flow. Heavy duty cast aluminum clamping ring and strainer dome enhance drain durability and will not rust. Also available with heat-weldable TPO coating (**TPO RetroDrain**) or PVC coating (**Heavy Duty AlumaWeld®**) for direct membrane attachment.

- Compatible with all commercial roof systems.
- 3-, 4-, 5- and 6-inch (75, 100, 125 and 150mm) diameters accommodate most field conditions.
- U-Flow® Seal offers a watertight connection.
- Exceeds ANSI/SPRI RD-1 standard.
- 12-inch (305mm) drain stem can be shortened on the job site.
- Custom lengths and configurations available.

The **RAC Deluxe RetroDrain®** is a lower cost alternative retrofit roof drain but offers many of the same features of other OMG drains. Constructed of aluminum and stainless steel for durability, the RAC Deluxe features a mechanical compression seal to prevent damage from water back-up, exceeding the ANSI/SPRI RD-1 standard.

- Compatible with PVC and cast iron leader pipes.
- Features an extra large flange for membrane attachment, a recessed metal clamping ring and oversized strainer.
- Available in 3-, 4-, 5- and 6-inch (75, 100, 125 and 150mm) sizes.

The universal **QuadFlash** provides a fast and efficient method for sealing rooftop pipe penetrations. QuadFlash can handle up to four pipes ranging in size from 3/8- to 2-inches (9 to 50mm) in diameter, and will not crack as pipes expand and contract. QuadFlash is maintenance-free and available with black and white EPDM caps.

The **OlyVent** is engineered to prolong the life of the roof system by allowing trapped moisture and air to escape. OlyVents are available as either one-way vents or two-way breathers, and feature a flared base for improved airflow.



**Hercules  
RetroDrain**

**TPO RetroDrain  
or PVC Coated  
Heavy Duty  
AlumaWeld**



**U-Flow  
Seal**



**RAC Deluxe  
RetroDrain**



**QuadFlash**



**OlyVent**

As with all building materials it is the responsibility of the installer to review its usage with a design professional to confirm safety, compatibility and acceptance with the roof cover manufacturer as well as local building codes.

# superior performance



**RhinoBond®** is a superior method for attaching insulation and thermoplastic (TPO or PVC) roofing membranes. It offers higher wind ratings with up to 50% fewer fasteners, up to 20% fewer seams, and zero penetrations.

The system uses one fastener and plate to secure the insulation and the membrane without penetrating the roof cover. There are no seam fasteners and since the fastening points are spread across the roof in a grid pattern, the uplift load is more evenly distributed. It provides higher wind ratings and virtually eliminates rooftop flutter.


In addition to providing superior wind uplift performance, RhinoBond does not require half sheets so there are fewer rooftop seams. Based on patented electromagnetic welding technology, RhinoBond is easy to use and approved by Factory Mutual as well as by most roofing system manufacturers.



RhinoBond spreads wind load across the roof



Fasten the membrane without penetrating it!

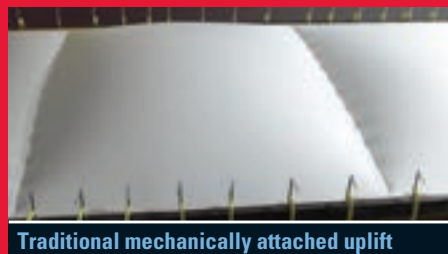

Traditional mechanically attached uplift

## hassle-free repairs

*Professional grade roof repair tape*

Whenever you have a roof leak or repair to deal with, **OMG EverSeal®** brand of roof repair tape is the ideal choice. It's fast, watertight and designed for use on most roof surfaces. EverSeal features OMG's exclusive Advanced Synthetic Adhesive Polymer (ASAP) technology that bonds to most common roofing surfaces including: EPDM, TPO, aged PVC, HYPALON®/CSPE, modified bitumen, smooth BUR, metal and more!

- OMG's exclusive **Ready-to-Roll™** dispenser box packaging makes installation easy and hassle-free. It's convenient for product handling and storage, too.
- EverSeal is **available in 4-, 6- and 12.5-inch x 50-foot lengths (100, 150 and 315mm x 15.24m)** and comes in both black and white.
- **Synthetic polymer adhesive** – non-asphaltic formulation for maximum compatibility.
- **No primers needed** – faster installation without waiting for primers to flash.
- **Hassle-free EZ-Release Liner™** – No frustration when peeling the liner from the adhesive.
- **Chemical & UV resistant** – For superb long-term performance.
- **Wide installation temperature range** – Can be used year-round.
- **Available individually or in master boxes** – For easy handling and storage.



*EverSeal will adhere to most construction materials. Use it to repair gutters and edge metal as well as flash skylights and penetrations. Great for RV roofs, tents and awnings, too!*



[www.OMGRoofing.com](http://www.OMGRoofing.com)

800.633.3800



# productivity

*By leading the commercial roofing industry in emerging technologies that promote ergonomics, efficiency and excellence, OMG is helping roofers to work faster, safer and with better results.*

**AccuTrac®**, **RhinoTrac®** and **AccuSeam®** are automated attachment systems providing the lowest installed cost for mechanical insulation and membrane attachment. In one step, the tool positions the plate as the roof mechanic drives the fastener, doing the job of two, reducing labor and increasing productivity. In addition, these easy-to-use tools are ergonomically designed to minimize bending and reduce worker fatigue.



AccuTrac



AccuSeam



*Interchangeable drive shaft fits all three boots!*



**AccuTrac for Insulation Attachment**



**RhinoTrac for RhinoBond Plate Installation**




**AccuSeam for Membrane Attachment**



OMG's high performance **Polymer Batten Bar** is designed for attaching single-ply membranes to steel, wood and structural concrete roof decks. Packaged in 250-foot (76.25m) coils, the Polymer Batten Bar is pre-punched 3-inches (75mm) on center and supplied in a "pizza" style box for easy handling on the roof.



The **Tall Boy®** is a lightweight tool designed to install standard or heavy duty OMG ASAP fasteners with either 2- or 3-inch (50 or 75mm) plates. Tall Boy tools are 30-inches (760mm) long, include a variable speed screw gun and are easily adjustable to prevent overdriving fasteners.

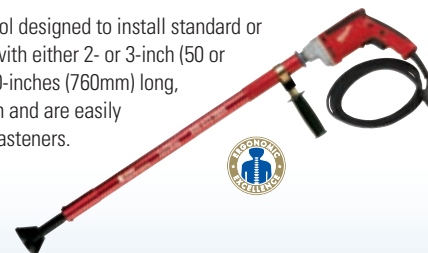



# adhesives

*OlyBond – The most trusted name in adhesive insulation attachment*



**OlyBond® Insulation Adhesives** are easy to use, hassle-free and designed to get you off the roof and onto the next job quickly. OlyBond adhesives are approved for use on most roof decks and with all common insulation types. No matter what size the roof is, there's an OlyBond adhesive that's right for your next project.



**OlyBond500®** is the premiere insulation adhesive for low-slope roofing applications. The fast-acting, dual-component, low-rise polyurethane foam adhesive is odor and noise-free, and offers the lowest installed cost method of insulation attachment. Factory Mutual, Underwriters Laboratories, Florida Building Code and Miami Dade approved.

**OlyBond500 Green** is the perfect insulation adhesive for LEED and sustainable projects. A low VOC, plant-based formula, OlyBond500 Green packs the same performance punch as the original OlyBond500. Factory Mutual, Florida Building Code and Miami Dade approved.

**OlyBond Classic** is a spray-applied, dual component adhesive used to fully adhere a wide variety of board stocks to most roofing substrates in both new and reroofing applications.

**OMG PCPreserver™** is an easier, safer, and non-hazardous option for preparing a PaceCart for storage. It is used to flush OlyBond500 adhesive residue from PaceCarts and is also designed to help keep pumps, hoses, and the gun assembly sufficiently lubricated during periods of extended storage. The product is packaged in convenient 1-gallon (3.78 L) containers that come with a snap-in-place spout for easy connection to the PaceCart.

Rest easy with **NightShot®** temporary watertight tie-in. OlyBond NightShot forms a temporary seal between new single-ply roof covers and existing asphalt roof covers. NightShot comes in 1,500 ml cartridge sets and is compatible with new EPDM, TPO and PVC materials.

## application tools

OMG offers several easy-to-use tools for applying OlyBond500 Insulation Adhesives:

**PaceCart 2®** is the exclusive patented applicator for dispensing OlyBond500. Capable of dispensing enough OlyBond500 to apply 60 squares (5.58 m<sup>2</sup>) of insulation per hour, this tool is the fastest, lowest-cost system available. The PaceCart 2 features a clean, air-tight delivery system for patented Bag-in-Box technology.

The **Cordless Power Applicator** provides constant pressure for even, uninterrupted, adhesive flow and maximum efficiency. The Power Applicator significantly increases production when compared to hand applicators, and comes with two batteries and a charger.



[www.OMGRoofing.com](http://www.OMGRoofing.com)

800.633.3800

# fasteners



## Standard RoofGrip® Drill Point Fastener

1½"–8" (40–200mm) lengths  
#3 Phillips head  
**S W** deck types

## Heavy Duty Roofing Fastener

1¼"–24" (30–610mm) lengths  
#3 Phillips head  
**S W SC** deck types

## Extra Heavy Duty Fastener

2"–16" (50–405mm) lengths  
#3 Phillips head  
**S W AL** deck types

## RetroDriller Fastener

4"–10" (100–255mm) lengths  
#3 square drive  
**P** deck type

## Purlin Fastener

3¾"–8" (95–200mm) lengths  
¼ hex head  
**P** deck type

## HeadLok®

2½"–18" (70–455mm) lengths  
Oversized head; installed with  
SpiderDrive® bit  
**S W SC** deck types

## CD-10

2"–12" (50–305mm) lengths  
Flat top pan head  
Diamond guide point  
**SC** deck type

## Lite-Deck Fastener

2½"–12" (65–305mm) lengths  
#3 square drive flat head  
**G CW** deck types

## Polymer GypTec®

2½"–12" (60–305mm) lengths  
¼" (5mm) square drive  
**G CW** deck types

## Masonry Anchor

⅞"–2" (22–50mm) lengths  
⅜"–¼" (4–6mm) diameters  
Zinc plated pin  
**CMU M SC** substrates

## OMG X-Wing™

Zinc plated toggle for use with  
Extra Heavy Duty Fasteners  
**LWIC G CW** deck types



*OMG Roofing Products has the industry's widest assortment of specialty roof fasteners and plates for virtually every roofing application.*



## Steel Plate

2" and 3" (50 and 75mm)  
diameters available




## Plastic Locking Plate

2" and 3" (50 and 75mm)  
diameters available



## AccuTrac® Plate

For use with AccuTrac tool  
3" (75mm) square steel insulation  
plate, flat or recessed

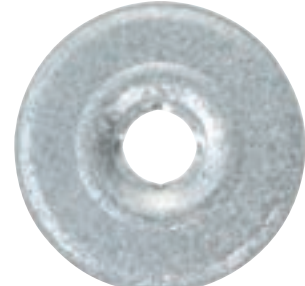

## GypTec® Plate

2" and 3" (50 and 75mm) diameter  
plates available



## RhinoBond® Plates

For PVC and TPO membranes  
3" (80mm) diameter



key

**S** Steel  
**W** Wood  
**G** Gypsum  
**M** Masonry

**P** Purlins  
**AL** Aluminum  
**SC** Structural Concrete  
**LC** Lightweight Concrete

**LWIC** Lightweight Insulating Concrete  
**CMU** Concrete Masonry Unit  
**CWF** Cementitious Wood Fiber

[www.OMGRoofing.com](http://www.OMGRoofing.com)

800.633.3800





#### OlyLok Locking Impact Nail

1.4" and 1.8" (35 and 45mm) tube lengths with 2.7" (70mm) plate  
**LWC G CWF** deck types



#### Base Sheet Fastener

1.2" and 1.75" (30 and 45mm) lengths  
Available assembled with 2.75" (70mm) plate  
**LWC G**\* deck types \*Restrictions apply.



#### ASAP® (Assembled Screw And Plate)

2¼"–8" (55–200mm) lengths; Standard or Heavy Duty Fasteners; Steel or Locking Plastic Plates  
**S W** deck types



#### Flat Bar

1" (25mm) wide, .090" (2.3mm) thick.  
Punched 6", 8", or 12" (150, 200 or 300mm) o.c. Terminates single-ply membrane at parapet walls



#### Lip Bar

¾" (19mm) wide, ⅜" (5mm) lip, .090" (2.3mm) thick. Punched 6", 8", or 12" (150, 200 or 300mm) o.c. Terminates single-ply membrane at parapet walls



#### Lite-Deck Batten Bar

18 ga. (1.3mm) thick  
Punched 6" or 12" (150 or 300mm) o.c.  
**LC G CWF** deck types



#### Polymer Batten Bar

¾"–1" (19–25mm) wide  
Punched 3" (75mm) o.c.  
**S W SC** deck types

## pipe supports

**OMG PipeGuard®** is the roofing industry's preferred method for supporting small rooftop pipes. OMG PipeGuard is a better alternative to wood blocks and will not deteriorate.

- Supports steel and PVC pipe, conduit and copper tubing
- Ideal for electrical, solar, gas, HVAC, etc.
- Designed to prevent damage to roof membranes
- Triangle shape sheds water
- Will not deteriorate from water or sunlight exposure
- Wide platform base provides stability and balance
- Nine models to choose from for pipes up to 6 inches (150mm) in diameter and heights up to 10 inches (255mm)
- Strut Model and Height Adjustable Strut supports multiple pipes\*




Made from 100% recycled material, new Safety Yellow models clearly identify trip hazards and are compatible with PVC.



\*Uses standard strut clamps, sold separately.



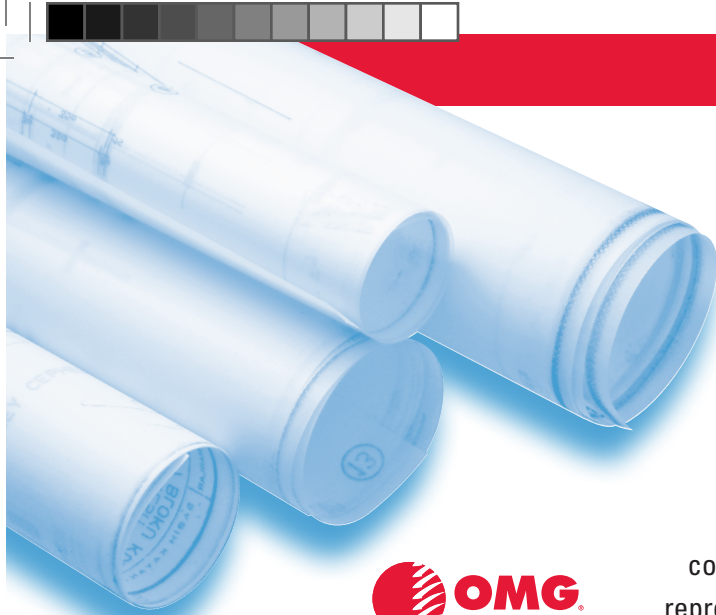

# at your service



Superior productivity. Superior performance.

For more information,  
contact your local OMG  
representative directly, or  
call one of our customer  
service specialists at

**800-633-3800.**



153 BOWLES ROAD, AGAWAM, MA 01001 USA

800-633-3800

413-789-0252

WWW.OMGROOFING.COM



The Roofing Industry **ALLIANCE** for Progress



The OMG PaceCart 2<sup>®</sup> dispensing cart and the Bag-in-Box OlyBond500<sup>®</sup> Part 1/Part 2 adhesive system, including the adhesive dispensing method, are covered by one or more of U.S. Patent Nos. 6,220,526; 8,113,385; 8,132,693; 8,167,170 and 8,474,658.

RhinoBond<sup>®</sup> is protected under U.S. Patent Nos. 6,710,314; 6,849,837; 7,399,949; 8,492,683; 8,933,379. Canadian Patent Nos. 2,458,353; 2,602,753. U.S. Patent Pending.

AccuSeam<sup>®</sup>, AccuTrac<sup>®</sup>, AlumaWeld<sup>®</sup>, ASAP<sup>®</sup>, EZ-Release Liner<sup>™</sup>, GypTec<sup>®</sup>, HeadLok<sup>®</sup>, Hercules<sup>®</sup>, NightShot<sup>®</sup>, OlyBond<sup>®</sup>, OlyBond500<sup>®</sup>, OlyFlow<sup>®</sup>, OMG EverSeal<sup>®</sup>, OMG PipeGuard<sup>®</sup>, OMG SpeedTite<sup>®</sup>, OMG X-Wing<sup>™</sup>, PaceCart 2<sup>®</sup>, OMG PCPreserver<sup>™</sup>, Ready-to-Roll<sup>™</sup>, RetroDrain<sup>®</sup>, RhinoBond<sup>®</sup>, RhinoTrac<sup>®</sup>, RoofGrip<sup>®</sup>, Tall Boy<sup>®</sup> and U-Flow<sup>®</sup> are trademarks of OMG, Inc. Copyright © 2015, OMG, Inc. All rights reserved.

GEN1000 Rev. 1015