

ReechCraft™ **PowerLiFT**™

CONVENIENT, SECURE and EASY TO USE

Quickly Assembled • No-Tools Mast Connection System • Ultra Lightweight



ReechCraft™ PowerLIFT™

Finally, there is a practical lift for tight spaces in industrial buildings, offices and even residences.

EASY ELEVATION

Stacking mast sections allow PowerLift to be customized to any work height up to 26 ft.

SAFETY

- Complies with safety standards
- Fully enclosed personnel basket
- Safety harness anchor point
- Emergency lowering system

PORTABILITY

- 360° turning radius
- Easily rolls across any terrain
- Easily transports on the hitch of a vehicle
- Fits through standard doors, elevators and closets

ULTRA LIGHTWEIGHT

- One-person operation
- Easy on finished floors
- Can go anywhere, even up stairways
- Use outdoors and on turf

SIMPLICITY

- No electronics
- No hydraulics
- No batteries

EASY TO MANEUVER

Four swiveling caster wheels make maneuvering the PowerLift easy. Use the 12 in. non-flattening transport wheels for uneven terrain or stairs.


SIMPLE TO OPERATE

PowerLift fits in tight spaces better than scissor and telescoping lifts. Simple to operate and great for businesses, schools and rental applications.

| DESCRIPTION | M20 | PL60 |
|---------------------------------|---|---|
| Conforming Standards | ANSI A92.3 | ANSI A92.3 |
| Platform Capacity | 350 lbs (159 kg) | 350 lbs (159 kg) |
| Power Source | AC or DC Drill | AC or DC Drill |
| Rated Horizontal Force | 52.5 lbs (23.46 kg) (234 N) | 52.5 lbs (23.86 kg) (234 N) |
| Machine Weight | 278 lbs (126 kg) | 310 lbs (141 kg) |
| Swivel/Lockable Caster Diameter | 5 in. (127 mm) | 127 mm |
| Platform Size (L x W) | 26 in. x 30 in. (660 mm x 762 mm) | 26 in. x 30 in. (660 mm x 762 mm) |
| Mast Section Weight | 20.7 lbs (9.4 kg) | 28.5 lbs (12.9 kg) |
| Rear Outrigger Weight | 7.8 lbs (3.6 kg) | 9.3 lbs (4.2 kg) |
| Front Outrigger Weight | 10.3 lbs (4.7 kg) | 10.6 lbs (4.8 kg) |
| Flat-Free Transport Wheels | 12 in. x 3.5 in. (205 mm x 89 mm) | 12 in. x 3.5 in. (305 mm x 89 mm) |
| Drive | Worm Drive with Integrated Drive Gear and Brake | Worm Drive with Integrated Drive Gear and Brake |
| Stowed Length | 53 in. (1346 mm) | 53.4 in. (1356 mm) |
| Stowed Width | 30 in. (762 mm) | 30 in. (762 mm) |
| Stowed Height | 69 in. (1741 mm) | 69 in. (1741 mm) |
| Minimum Platform Height | 12.9 in. (329 mm) | 12.9 in. (329 mm) |
| Outrigger Footprint Width | 52.1 in. (1324 mm) | 67.1 in. (1705 mm) |
| Outrigger Footprint Length | 58.9 in. (1496 mm) | 64.4 in. (1635 mm) |
| Distance from Wall Side | 11 in. (281 mm) | 18.5 in. (471 mm) |
| Distance from Wall Front | 12.3 in. (314 mm) | 10.3 in. (261 mm) |
| Erected Mast Height | 16.3 ft (5.0 m) | 21.7 ft (6.60 m) |
| Maximum Platform Height | 14.3 ft (4.34 m) | 19.5 ft (5.94 m) |
| Maximum Working Height* | 20.3 ft (6.19 m) | 25.5 ft (7.77 m) |

*Maximum Platform Height plus 2 m

Nothing Else Stacks Up.

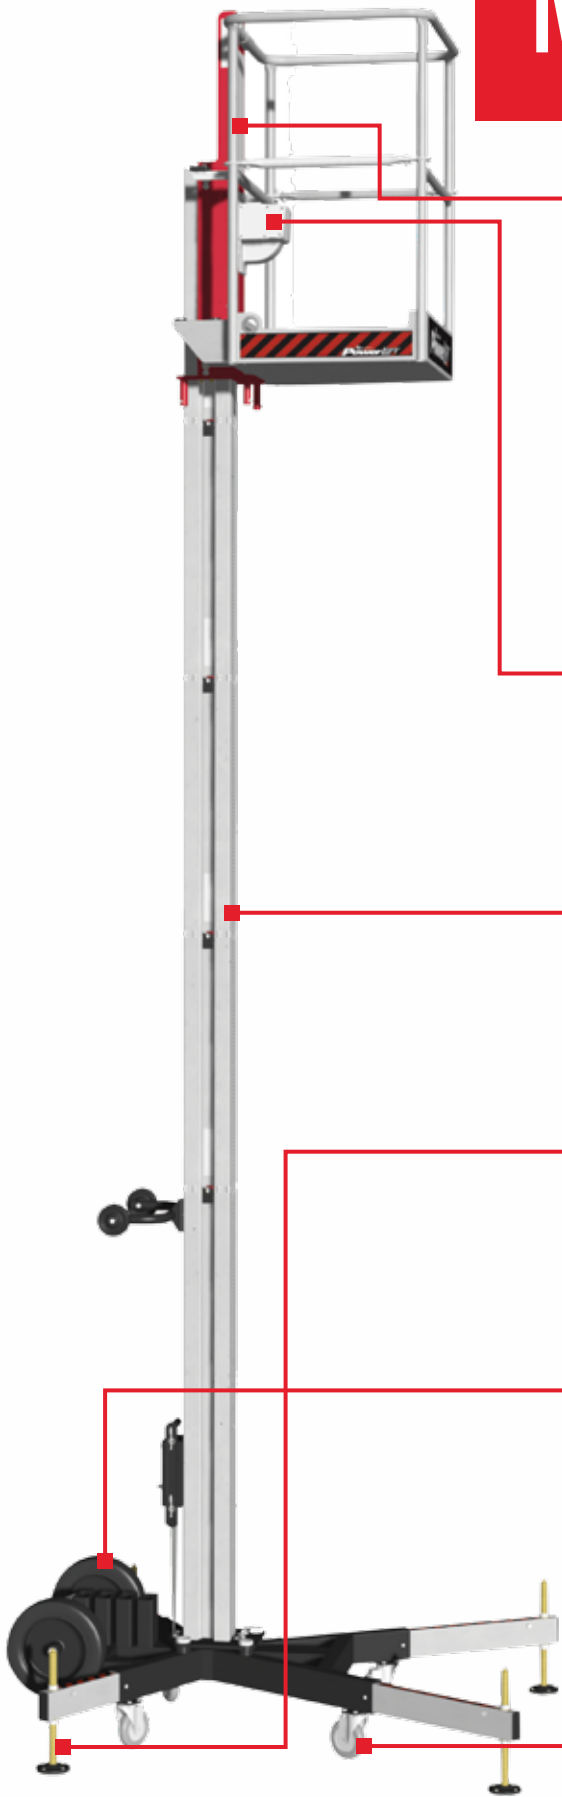

STOWABLE MAST SECTIONS

Mast extensions are conveniently stowed alongside the basket. Adding, removing and stowing mast sections takes only seconds.



DUAL ACCESS BASKET

Dual Access basket allows entry and exit from two sides. The basket can be easily removed for transport and storage.



EXCLUSIVE TECHNOLOGY

ReechCraft's exclusive PowerTrak™ technology includes a gearbox with internal clutch and cone brake for added safety.



CUSTOMIZE FOR ANY HEIGHT

Specially designed coupler system allows for quick and easy attachment of extensions. Lock levers prohibit the advancement of the basket unless they are securely locked in place.



EASY TO ADJUST

Easy-to-adjust outrigger pads fit in tight spaces. Ultra lightweight load is easy on floors and more useful in outdoor turf and terrain conditions.



EASY TO TRANSPORT

12 in. flat-free transport tires allow easy movement across uneven terrain, curbs and steps.

CASTER WHEELS

Four non-marking, locking caster wheels on the main carriage make maneuvering the PowerLift easy.

ADDITIONAL ACCESSORIES

HITCH HAULER

PowerLift accessories like the convenient Hitch Hauler eliminate the need for a trailer – any vehicle with a type III (2 in.) receiver hitch can transport the PowerLift. The PowerLift can be loaded and secured in under 15 seconds and no ropes, chains or straps are required. No trailer is needed and you can keep your storage space available in the vehicle.



NARROW PLATFORM

The narrow platform is 20 in. W x 26 in. L and allows you to get through t-bar applications and many other tight spaces. The narrow platform fits the PowerLift models M20, M20C, PL60 and PL60C.

CRANE HOOK KIT

The PowerLift Crane Hook Kit provides safe and convenient boom truck loading.

EASY TO MANUEVER



FOUR SWIVELING/LOCKABLE CASTERS

The base features four swiveling and lockable casters which allows the PowerLift to easily rotate 360° to make any job accessible.



PUSH IT. PULL IT. SPIN IT.

The two transport wheels make moving the ultra lightweight system even easier across any terrain.



MAKE IT EVEN LIGHTER

The PowerLift components are easily removable making the PowerLift lighter and more portable.