



The Dynasty Omni Lamp is the perfect solution for street and parking lot lighting when looking for an easy, screw-in replacement for High-Pressure Sodium or Metal Halide lamps that consume excessive energy. Our lamps range from 8 to 120 watts per bulb and are UL listed. All the lamps with E39 mogul bases are DLC listed, therefore they qualify for energy rebates from most power companies nationwide. The Dynasty Omni Lamp can be used in a fully enclosed fixture or can be exposed to the elements. They are perfect for high bay lighting, acorn fixtures, and street/parking lot lighting.

Every Dynasty Omni Lamp comes with our no-hassle 5 year replacement warranty, but with a lifespan of up to 10 years, the lamp will keep shining long after the warranty. Unlike Metal Halide or High Pressure Sodium Lamps that consume large amounts of energy each month, our Dynasty Omni Lamp will greatly reduce overall electrical consumption and save up to 87% on your utility bill from the first day installed. For more Dynasty Lighting products look for the butterfly!

## APPLICATIONS

- High bay lighting
- Street lighting
- Acorn lighting
- Parking lot lighting


## BENEFITS

- Replaces High Pressure Sodium and Metal Halide
- Energy efficient
- 5 year warranty
- No fragile glass
- Built-in power supply, no external ballast required
- No toxic materials, RoHS compliant
- Low carbon footprint
- Full brightness in cold temperatures
- CCT tolerances comply with ANSI C78.377-2008 standard

## FEATURES

- Environmentally friendly
- Omni directional
- 87% savings on electrical costs
- Suitable for enclosed fixtures
- Operates 100-277 VAC, 50-60 Hz with a power factor of  $\geq 0.9$
- UL/CSA listed
- Reliability Test/1,000,000 cycles
- Surge protection
- UL/DLC Listed
- Patented air gap design to increase life expectancy for the driver



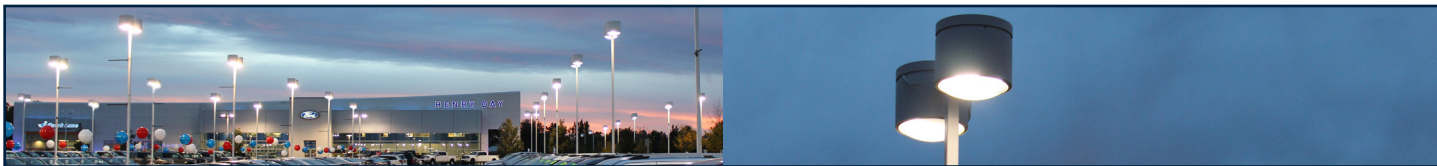

Product #	Watts	CCT	Lumens	Warranty	CRI	Socket	LED Quantity	Power Factor	Dimensions
801-08W-30K-E26	8	3000k	960 ± 40	5	> 80	E26	24	≥ 0.90	Ø 2.36" x 4.84"
801-08W-40K-E26	8	4000k	960 ± 40	5	> 80	E26	24	≥ 0.90	Ø 2.36" x 4.84"
801-08W-50K-E26	8	5000k	960 ± 40	5	> 80	E26	24	≥ 0.90	Ø 2.36" x 4.84"
801-10W-30K-E26	10	3000k	1200 ± 50	5	> 80	E26	32	≥ 0.90	Ø 2.36" x 5.63"
801-10W-40K-E26	10	4000k	1200 ± 50	5	> 80	E26	32	≥ 0.90	Ø 2.36" x 5.63"
801-10W-50K-E26	10	5000k	1200 ± 50	5	> 80	E26	32	≥ 0.90	Ø 2.36" x 5.63"
801B-14W-30K-E26	14	3000k	1680 ± 70	5	> 80	E26	42	≥ 0.90	Ø 2.76" x 5.98"
801B-14W-40K-E26	14	4000k	1680 ± 70	5	> 80	E26	42	≥ 0.90	Ø 2.76" x 5.98"
801B-14W-50K-E26	14	5000k	1680 ± 70	5	> 80	E26	42	≥ 0.90	Ø 2.76" x 5.98"
801B-18W-30K-E26	18	3000k	2160 ± 90	5	> 80	E26	56	≥ 0.90	Ø 2.76" x 6.77"
801B-18W-40K-E26	18	4000k	2160 ± 90	5	> 80	E26	56	≥ 0.90	Ø 2.76" x 6.77"
801B-18W-50K-E26	18	5000k	2160 ± 90	5	> 80	E26	56	≥ 0.90	Ø 2.76" x 6.77"
801B-22W-30K-E26	22	3000k	2640 ± 110	5	> 80	E26	70	≥ 0.90	Ø 2.76" x 7.56"
801B-22W-40K-E26	22	4000k	2640 ± 110	5	> 80	E26	70	≥ 0.90	Ø 2.76" x 7.56"
801B-22W-50K-E26	22	5000k	2640 ± 110	5	> 80	E26	70	≥ 0.90	Ø 2.76" x 7.56"
802B-27W-30K-E26	27	3000k	3240 ± 140	5	> 80	E26	81	≥ 0.90	Ø 3.66" x 8.30"
802B-27W-40K-E26	27	4000k	3240 ± 140	5	> 80	E26	81	≥ 0.90	Ø 3.66" x 8.30"
802B-27W-50K-E26	27	5000k	3240 ± 140	5	> 80	E26	81	≥ 0.90	Ø 3.66" x 8.30"
802B-27W-30K-E39	27	3000k	3240 ± 140	5	> 80	E39	81	≥ 0.90	Ø 3.66" x 8.30"
802B-27W-40K-E39	27	4000k	3240 ± 140	5	> 80	E39	81	≥ 0.90	Ø 3.66" x 8.30"
802B-27W-50K-E39	27	5000k	3240 ± 140	5	> 80	E39	81	≥ 0.90	Ø 3.66" x 8.30"
802B-36W-30K-E39	36	3000k	4320 ± 190	5	> 80	E39	108	≥ 0.90	Ø 3.66" x 9.50"
802B-36W-40K-E39	36	4000k	4320 ± 190	5	> 80	E39	108	≥ 0.90	Ø 3.66" x 9.50"
802B-36W-50K-E39	36	5000k	4320 ± 190	5	> 80	E39	108	≥ 0.90	Ø 3.66" x 9.50"
802B-45W-30K-E39	45	3000k	5400 ± 240	5	> 80	E39	135	≥ 0.90	Ø 3.66" x 10.67"
802B-45W-40K-E39	45	4000k	5400 ± 240	5	> 80	E39	135	≥ 0.90	Ø 3.66" x 10.67"
802B-45W-50K-E39	45	5000k	5400 ± 240	5	> 80	E39	135	≥ 0.90	Ø 3.66" x 10.67"
802B-54W-30K-E39	54	3000k	6480 ± 280	5	> 80	E39	162	≥ 0.90	Ø 3.66" x 10.67"
802B-54W-40K-E39	54	4000k	6480 ± 280	5	> 80	E39	162	≥ 0.90	Ø 3.66" x 10.67"
802B-54W-50K-E39	54	5000k	6480 ± 280	5	> 80	E39	162	≥ 0.90	Ø 3.66" x 10.67"
803B-080W-30K-E39	80	3000k	9600 ± 420	5	> 80	E39	234	≥ 0.90	Ø 5.87" x 9.21"
803B-080W-40K-E39	80	4000k	9600 ± 420	5	> 80	E39	234	≥ 0.90	Ø 5.87" x 9.21"
803B-080W-50K-E39	80	5000k	9600 ± 420	5	> 80	E39	234	≥ 0.90	Ø 5.87" x 9.21"
803B-100W-30K-E39	100	3000k	12000 ± 525	5	> 80	E39	280	≥ 0.90	Ø 5.87" x 9.57"
803B-100W-40K-E39	100	4000k	12000 ± 525	5	> 80	E39	280	≥ 0.90	Ø 5.87" x 9.57"
803B-100W-50K-E39	100	5000k	12000 ± 525	5	> 80	E39	280	≥ 0.90	Ø 5.87" x 9.57"
803B-120W-30K-E39	120	3000k	14400 ± 630	5	> 80	E39	336	≥ 0.90	Ø 5.87" x 10.35"
803B-120W-40K-E39	120	4000k	14400 ± 630	5	> 80	E39	336	≥ 0.90	Ø 5.87" x 10.35"
803B-120W-50K-E39	120	5000k	14400 ± 630	5	> 80	E39	336	≥ 0.90	Ø 5.87" x 10.35"

Note: Other CCTs and Socket Types available upon request.

Please call or visit our website to  
find a local distributor

### Cautions

- Do not place lamp near flammable materials.
- Please allow lamp to cool before replacing.



4628 West Skyhawk Drive, West Jordan, UT 84084-4501  
Phone 877.236.4401 Fax 801.256.9287  
www.caolighting.com  
info@caolighting.com

ISO 9001 CERTIFIED  
Patent #6,465,961, #6,634,770, #6,746,885, #7,728,345 and patents pending  
©2016 CAO Lighting, Inc. SAL-BR0047 V05.16.01 AC4128

