

The fast way to comply with
ligature resistance
safety standards.

Reduce ligature and safety
risks *immediately* while
reusing your existing
door and frame.

The SELECT SL57 aluminum full
surface geared continuous hinge
topped with our new, patented
metal TIPIT is designed to meet
patient safety standards.

See it at [www.omh.ny.gov/omhweb/
patient_safety_standards/guide.pdf](http://www.omh.ny.gov/omhweb/patient_safety_standards/guide.pdf)
(Division 08) and in the 2018
Facility Guidelines Institute (FGI)
Behavioral Health Design Guide.

This is your fast, money-saving
solution for deterring patient injuries
and eliminating maintenance
headaches for decades.

Don't wait for a Joint Commission
inspection to go into fast-compliance
mode. Call us today!



Maybe your
**problem
door**
isn't a door
problem.

**Keep your door.
Keep your frame.
Change your hinge.**

SAVE TIME AND MONEY BY FIXING
YOUR DOOR PROBLEMS FOR GOOD


 **SELECT
HINGES®**
SELECT Products Limited
800-423-1174 SelectHinges.com




SEE US AT NFM&T
BOOTH #2448

 **SELECT
HINGES™**

A SELECT hinge's 60-year life cycle means you can install it and forget it.

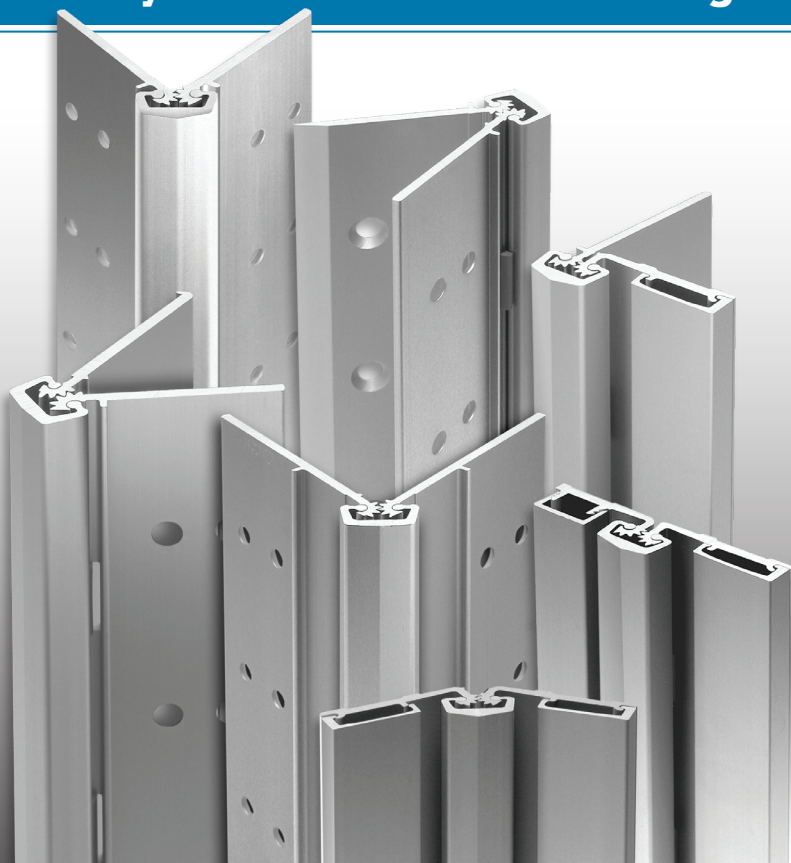

25,000,000




The warranty that never ends for the hinge that never quits.™

Independent lab tests on an FRP door prove SELECT hinges withstand 25,000,000 cycles — 10 times beyond Grade 1 cycle count. That equals more than 60 years of high-traffic use, more traffic than most doors see in a lifetime.


SELECT hinges' durability means we can offer the industry's only Continuous Warranty™. It covers any failure of our aluminum geared continuous hinges — with no expiration date — as long as they were properly installed.

CONCEALED HINGES

Edge mount. No mortise required. For new construction or renovation/retrofit.

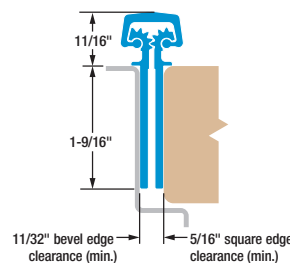


SL11 SD/HD/LL
Flush mounted (no door inset).

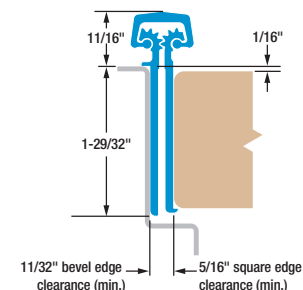


SL24 SD/HD/LL
1/16" door inset. Door edge protector. Frame leaf covers butt hinge preps.

FULL SURFACE HINGES

Mounts on face of door and frame. For renovation/retrofit or new construction.

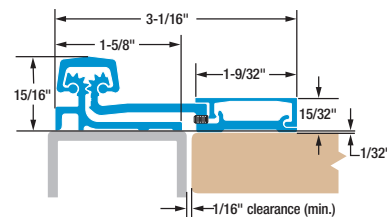


SL21 SD/HD
1/32" door inset. Swing-clear action. Tamper-resistant, removable door leaf cover.

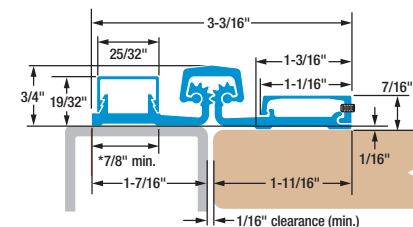

SL57 SD/HD
1/16" door inset. Frame leaf fits narrow (7/8") frame face. Tamper-resistant door leaf cover.

TOILET PARTITIONS

For high-frequency stall doors up to 80 lb., 36" wide.

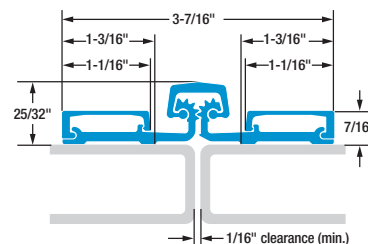


SL60
57" length. Hinge opens to 180°.

SL62
57" length. Self-closing hinge opens to 120°.

HALF SURFACE HINGE

Mounts on door face and frame rabbet. For renovation/retrofit or new construction.

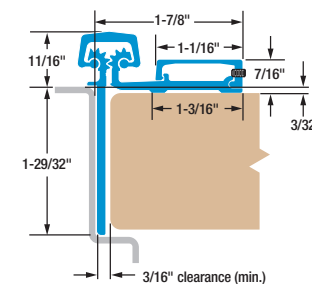

SL54 HD
3/32" door inset. Frame leaf covers butt hinge preps. Tamper-resistant, removable door leaf cover.